

EXHAUST DUCT RETAINING RING INSTALLATION INSTRUCTIONS

MODELS: BELL 212/412

Read all of the instructions thoroughly prior to the installation of this product.

Revision: NC

Date: Feb. 11, 2000 Doc. No.: 191M-99-005-II Page 1 of 3



INSPECTION

1) Refer to the Exhaust Duct Retaining Ring Maintenance Manual Supplement, Models: BELL 212/412.

Document No.: 191M-99-005-MMS

WEIGHT & BALANCE

Weight
(Lbs.)Long. Arm
(Inches)Lat. Arm
(Inches)

Exhaust Duct Retaining Ring Assy

INSTALLATION NOTES

- 1) All instructions, where applicable, are to be completed using standard aircraft sheet metal and maintenance practices.
- 2) All hardware must be torqued to standard specs.
- 3) Reference numbers in installation correspond to dash numbers in Parts List.

<u>INSTALLATION</u>


- 1) Remove existing fasteners for retaining Exhaust Ducts and discard.
- 2) Install Retaining Ring, -101, ensuring the inside radiused edge is facing down as shown. Reference Figure 1.
- 3) Install new fasteners as shown. Reference Figure 1.

Revision: NC

Date: Feb. 11, 2000 Doc. No.: 191M-99-005-II Page 2 of 3



INSTALLATION

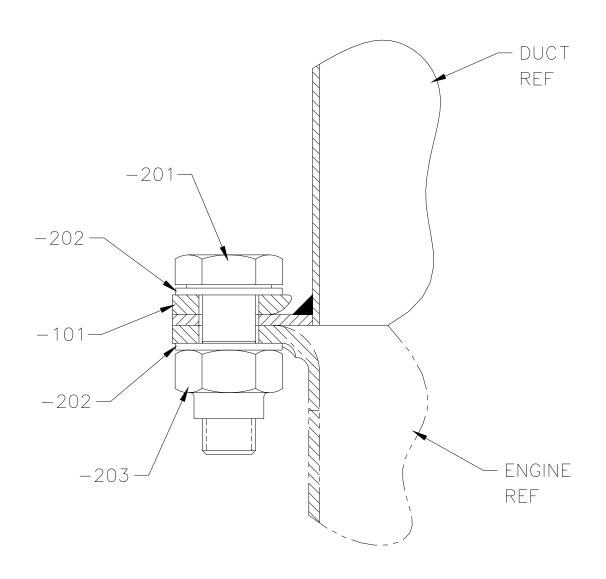

TYP BOLT INSTALLATION 28 PLACES FIGURE 1

Revision: NC

Date: Feb. 11, 2000 Doc. No.: 191M-99-005-II Page 3 of 3